

WARWICK USA



Lamps - 1 x 9w GU10 LED (not supplied)

Weight - 11 lb

IP Rating - IP21

Custom - Push switches can be added to the front fixing box on request


F O S B E R Y
S T U D I O

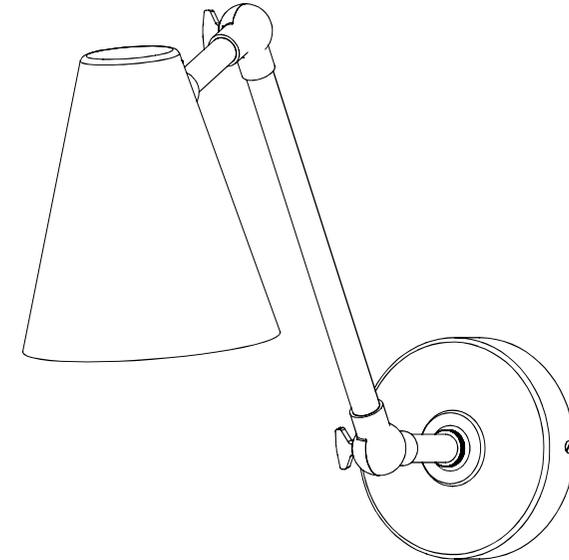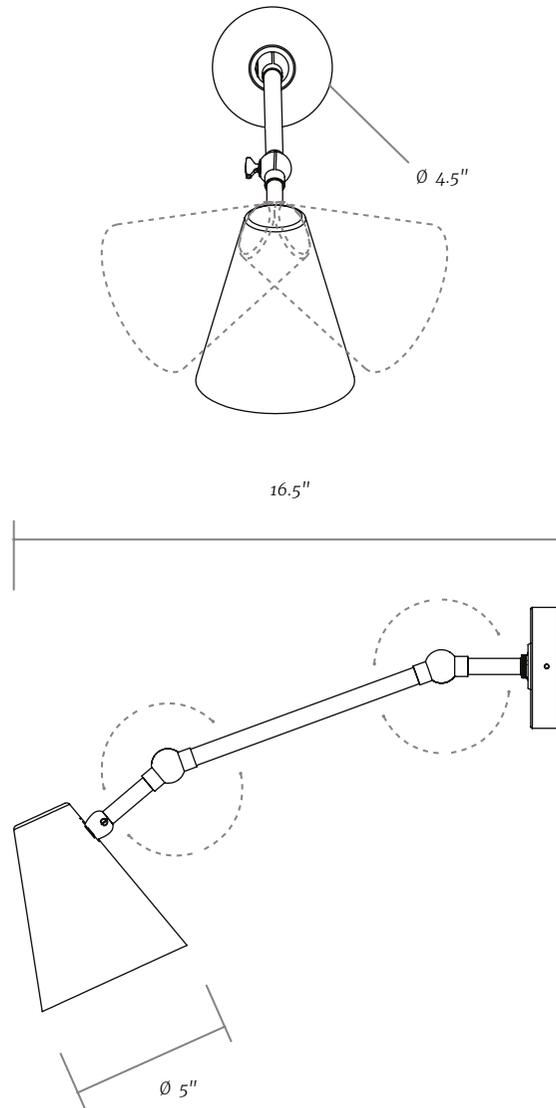


WARWICK FITTING INSTRUCTION (USA edition)

Fosbery Studio
26 Guildhall St
Folkestone
CT20 1DZ

CLIPPED TERMINAL BLOCKS ARE INCLUDED, INSTALLATION SHOULD BE CARRIED OUT BY A QUALIFIED ELECTRICIAN. ENSURE ALL POWER TO THE AREA IS OFF BEFORE WORKING.

HANDLE WITH CARE TO AVOID DAMAGE TO FINISH
RETAIN ALL PACKAGING UNTIL INSTALLATION IS COMPLETE
AND APPROVED.

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove strap from the backplate and keep the fixing screws somewhere safe.
3. Fix the strap central to where the backplate should be mounted.
4. Offer the fixture up to the strap and make the electrical connections within the backplate.
5. Once the electrical connections are made, offer the backplate up to the strap and fix into place via the fixing screws.
6. Fit the GU10 LED lamp (not supplied). **It is imperative that LED lamps are used. Failure to use LED lamps may cause the fixture to overheat.**
7. The lamp can be adjusted at the hinge joints by loosening the wing nut. The joint will then move to the desired location. Once satisfied, fix in place by tightening the wing nut. The joint is fitted with internal pins to keep the light from moving once fixed. The head of the lamp can be swung and fixed in place with the knurled screw. **Do not force any joints, they will move smoothly if released.**

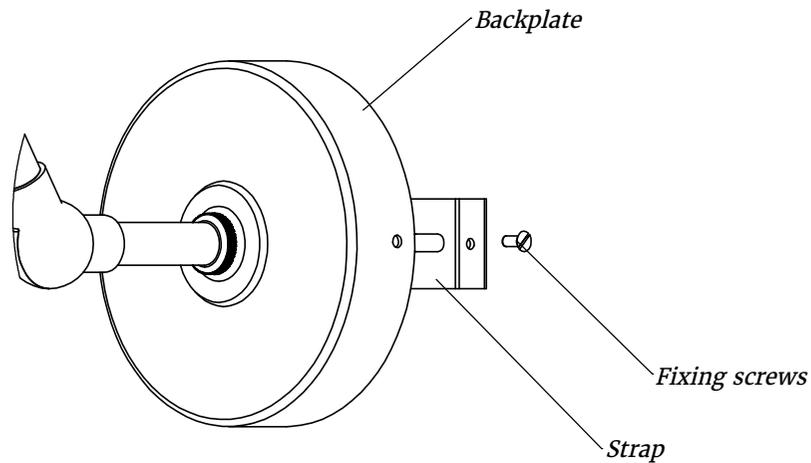

DETAIL A

