

CASCADE DROP

Lamps - 1 x 9w G9 LED (not supplied)



Weight - 3.5kg

IP Rating - IP21

Suspension options - Suspension rod or cord set

Custom - Shades made from customer's own material are available on request


F O S B E R Y
S T U D I O

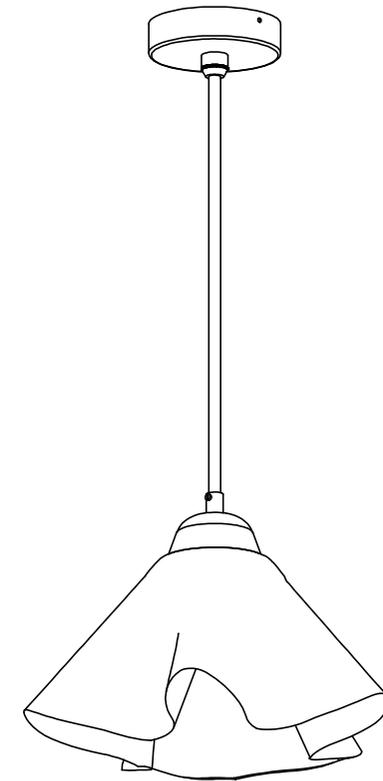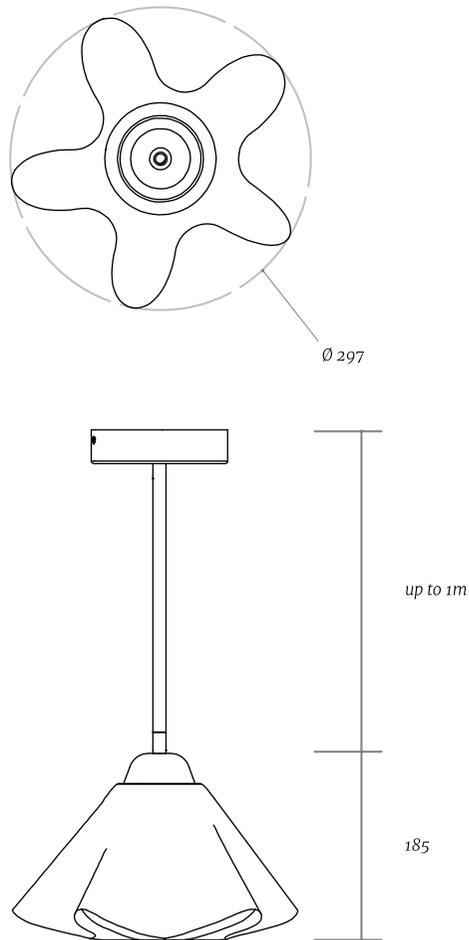

CASCADE DROP - CORD SET
FITTING INSTRUCTION

Fosbery Studio
26 Guildhall St
Folkestone
CT20 1DZ

CLIPPED TERMINAL BLOCKS ARE INCLUDED, INSTALLATION SHOULD BE CARRIED OUT BY A QUALIFIED ELECTRICIAN. ENSURE ALL POWER TO THE AREA IS OFF BEFORE WORKING.

HANDLE WITH CARE TO AVOID DAMAGE TO FINISH. RETAIN ALL PACKAGING UNTIL INSTALLATION IS COMPLETE AND APPROVED.

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove strap from the ceiling rose by unscrewing the supplied fixing screws.
3. Install the strap to the ceiling, central to the final position of the light and ensuring the fixings and the ceiling can support the weight of the pendant.
4. Check the final hanging height of the light before moving to the next steps. If the cable needs to be shortened, loosen the Cord grip (2) by unscrewing the tapered cover.
5. Pull the cable through the ceiling rose to the length needed, then leave 80mm length excess in the ceiling rose before cutting the cable.
6. **This step must be carried out by a qualified electrician.** Tape 50mm down the newly cut cable and with a sharp knife or cable cutter. Carefully cut the braid and the first layer of insulation to expose two individually coloured and insulated cables. Do not cut through the coloured insulation. If any copper strands can be seen do not connect to the mains.
7. Once the cable is the correct length, proceed to make a safe connection to the mains cable.
8. Raise the pendant up to the ceiling straps and secure the ceiling rose in place by screwing it to the strap with the screws provided.
9. Unroll the shade, which will be wrapped in tissue in the package and remove the shade frame by unscrewing the shade ring as shown.
10. Drape the shade over the shade frame and offer up to the lampholder, ensuring the shade is central.
11. Secure the shade frame and shade in place with the supplied shade ring.
12. Fit the G9 lamp into the lampholder and cover with the supplied glass casement.

