

MAYFAIR

Lamps - 3 x 15w E27 LED (not supplied)




Weight - 12kg

IP Rating - IP21

Suspension options - Suspension rod, Chain

Custom - Larger versions and shades made from customers own material are available on request


F O S B E R Y
S T U D I O

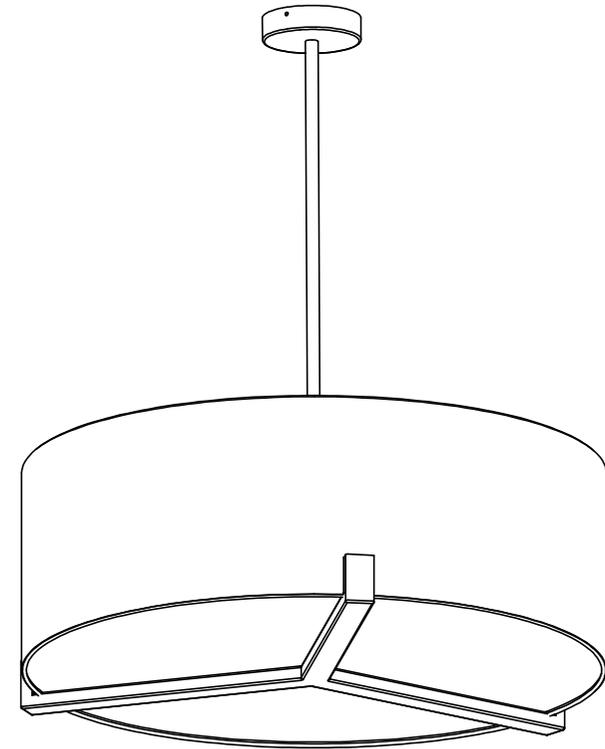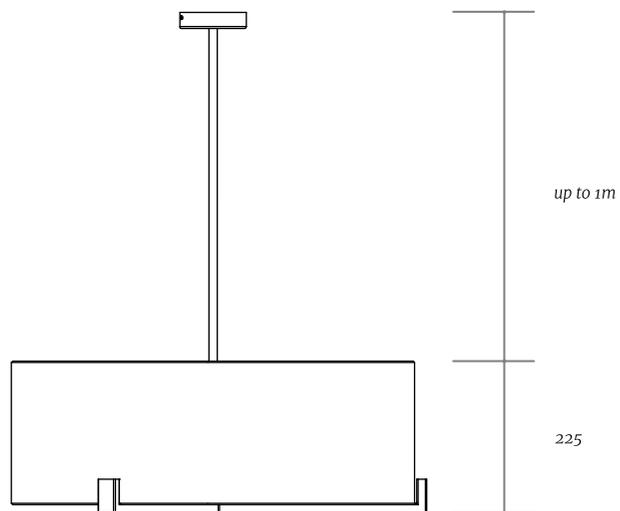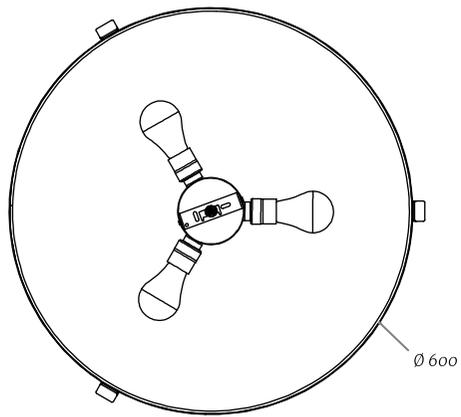


MAYFAIR FITTING INSTRUCTION

Fosbery Studio
26 Guildhall St
Folkestone
CT20 1DZ


CLIPPED TERMINAL BLOCKS ARE INCLUDED, INSTALLATION SHOULD BE CARRIED OUT BY A QUALIFIED ELECTRICIAN. ENSURE ALL POWER TO THE AREA IS OFF BEFORE WORKING.

HANDLE WITH CARE TO AVOID DAMAGE TO FINISH. RETAIN ALL PACKAGING UNTIL INSTALLATION IS COMPLETE AND APPROVED.

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Un-couple the cross from the 3-way hub by raising the cross up, rotating clockwise and then pulling down. *This should be a smooth procedure, do not force at any stage.* You can now fit the fixture, with the brass cross put to one side until the end of the install.
- Remove the strap from the ceiling rose by unscrewing the supplied fixing screws.
- Install the strap to the ceiling, central to the final position of the light and ensuring the ceiling can support the weight of the pendant.
- Feed electrical wires from the pendant up through the suspension rod, these can be cut shorter depending on ceiling height.
- Continue to feed the wires through the suspension rod up into the ceiling rose.
- Make a secure and safe connection to the mains cables in the ceiling and ensure the earth/ground wire is connected and grounded. The fixture *must* be grounded.
- Raise the pendant up to the ceiling strap and secure the ceiling rose in place by screwing it to the strap with the screws provided.
- Fit the lamps to the three lampholders. Test they are all gently screwed into contact and turn on.
- Dress the cross clasp by adding the diffuser and then the shade to sit onto it. Gently tuck the diffuser inside the bottom ring of the shade, by carefully flexing the diffuser on lifting inside the shade. Start at one point and work around the entire inside ring until all is neatly tucked into place.
- Offer the cross with shade and diffuser up to the 3-way hub. You can align the two parts of the bayonet coupler to allow for part A to rise up along the groove on part B (see below diagram), then turn clockwise approximately 90 degrees and then allow the cross to fall down into the final slot.
- The pendant is fitted with a pivoting hinge, so that the light can be adjusted once installed to hang level.

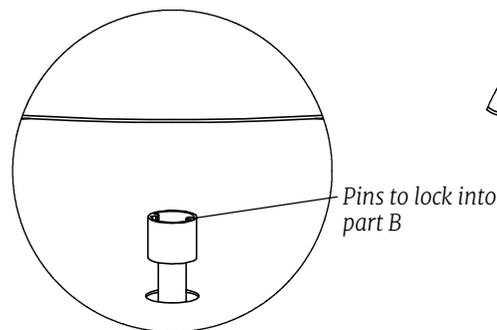

DETAIL A

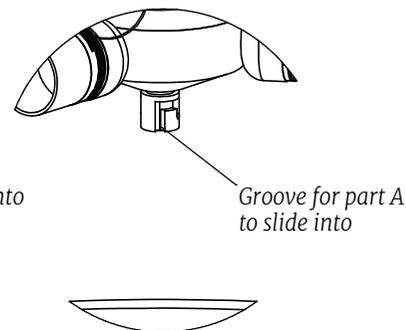

DETAIL B

