

HENLEY IP44 USA



Lamps - 1 x 9W G9 LED (not supplied)

Weight - 7 oz

IP Rating - IP44

Custom - Other metal finishes and shades made from customer's own material are available on request


F O S B E R Y
S T U D I O

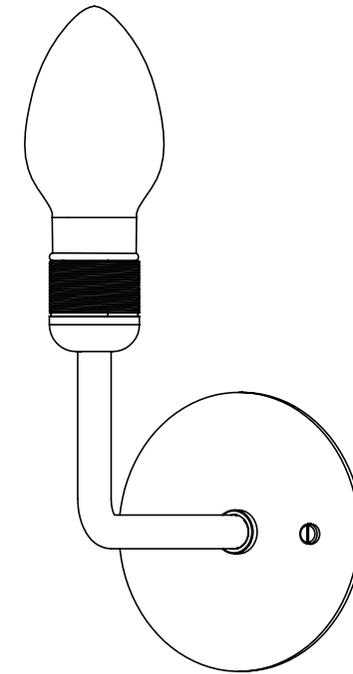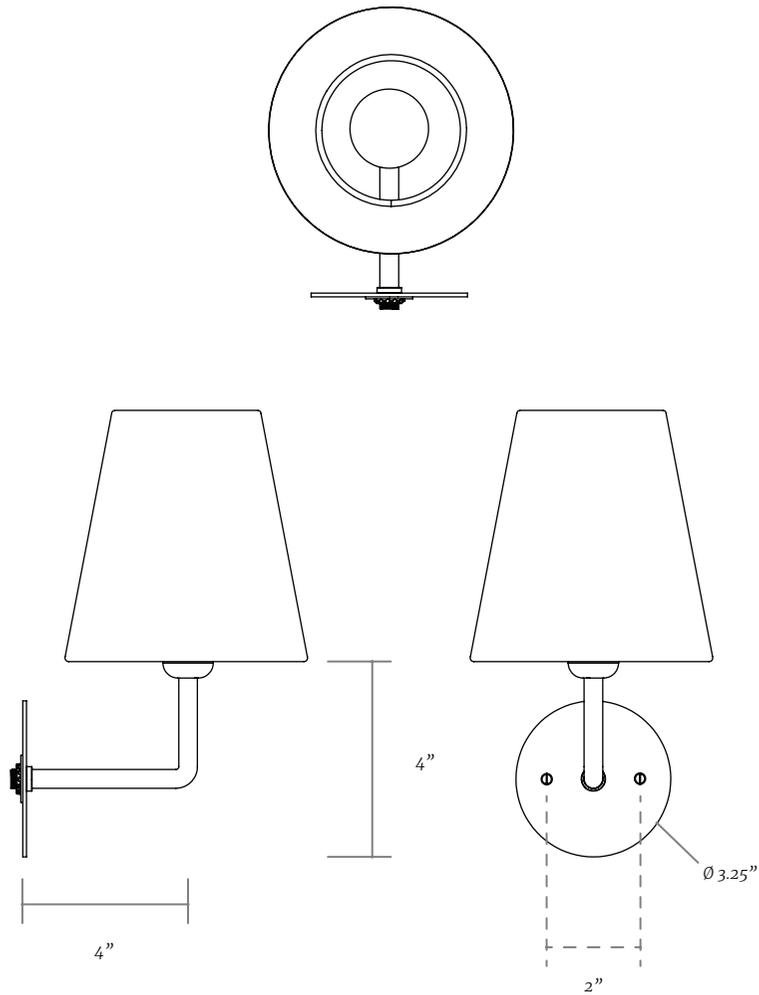


HENLEY IP44
FITTING INSTRUCTION
(USA edition)

Fosbery Studio
26 Guildhall St
Folkestone
CT20 1DZ

AN IP44 TERMINAL BLOCK IS INCLUDED. INSTALLATION SHOULD BE CARRIED OUT BY A QUALIFIED ELECTRICIAN. ENSURE ALL POWER TO THE AREA IS OFF BEFORE WORKING.

HANDLE WITH CARE TO AVOID DAMAGE TO FINISH. RETAIN ALL PACKAGING UNTIL INSTALLATION IS COMPLETE AND APPROVED.

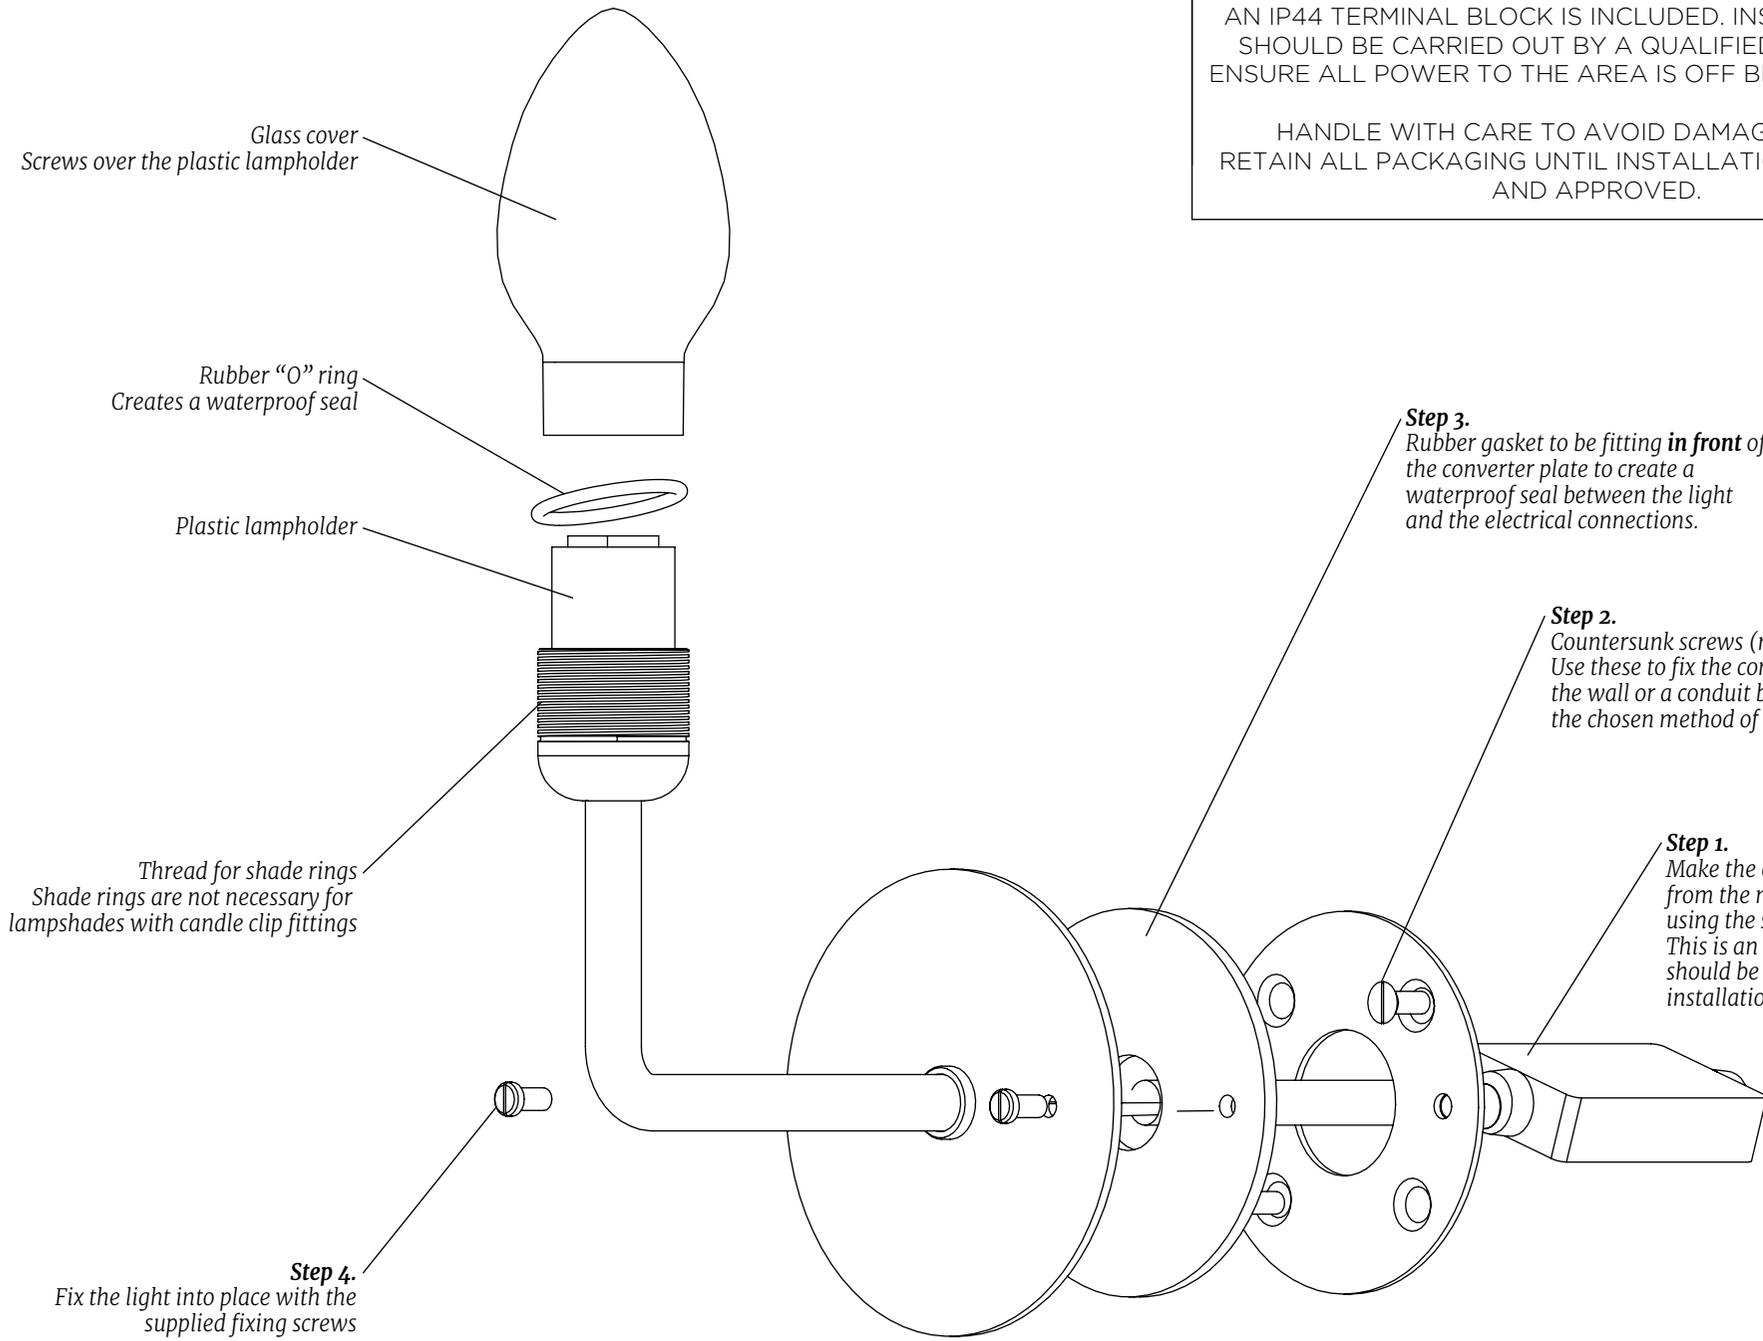

Glass cover
Screws over the plastic lampholder

Rubber "O" ring
Creates a waterproof seal

Plastic lampholder

Thread for shade rings
Shade rings are not necessary for lampshades with candle clip fittings

Step 4.
Fix the light into place with the supplied fixing screws

Step 3.
Rubber gasket to be fitting **in front** of the converter plate to create a waterproof seal between the light and the electrical connections.

Step 2.
Countersunk screws (not supplied). Use these to fix the converter plate to either the wall or a conduit box, depending on the chosen method of installation.

Step 1.
Make the electrical connection from the mains to the wall light using the supplied connector block. This is an IP44 rated box and should be used as part of the installation.